


Cable Stay Pedestrian Bridge, Red Butte Creek

#1

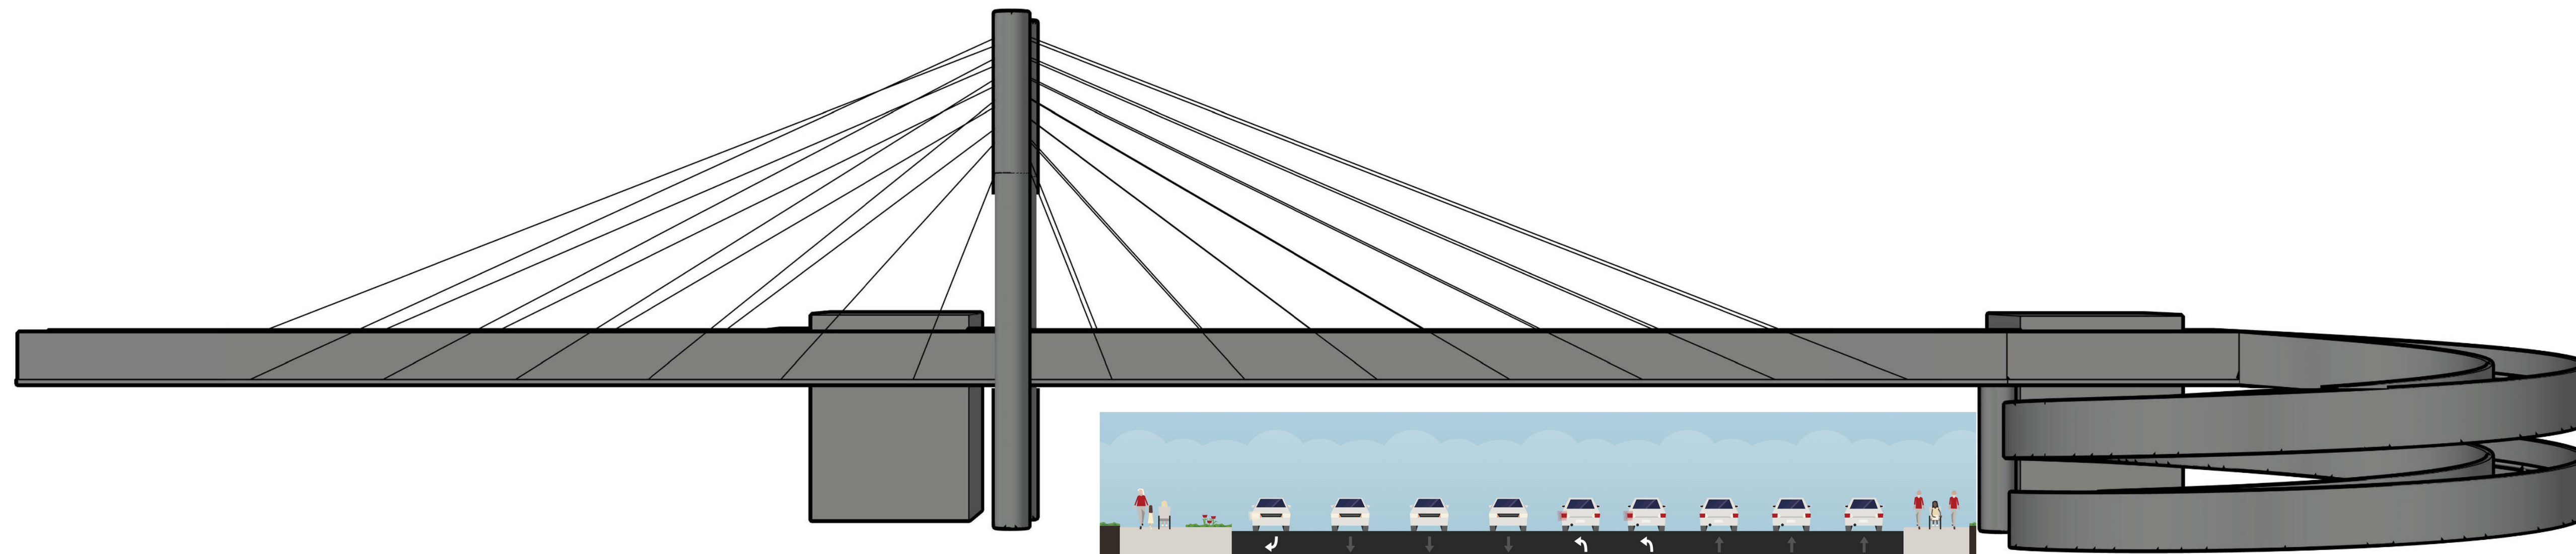


Proposed Cable Stay Bridge Over Foothill Drive
North View of the Bridge Model, With Streetmix Road Model

Student Engineer Team:
Benjamin Gerber, Ronnie Kaye, Wona Kim, Sebastian Lopez, Tessa Muir, Karlus Pulley

Project Purpose

1. Future Trail Crossing
2. Public Health & Safety
3. Address Dangerous Sidewalks & Crosswalks
4. Connection to Proposed Trail System
5. Alternative Transportation

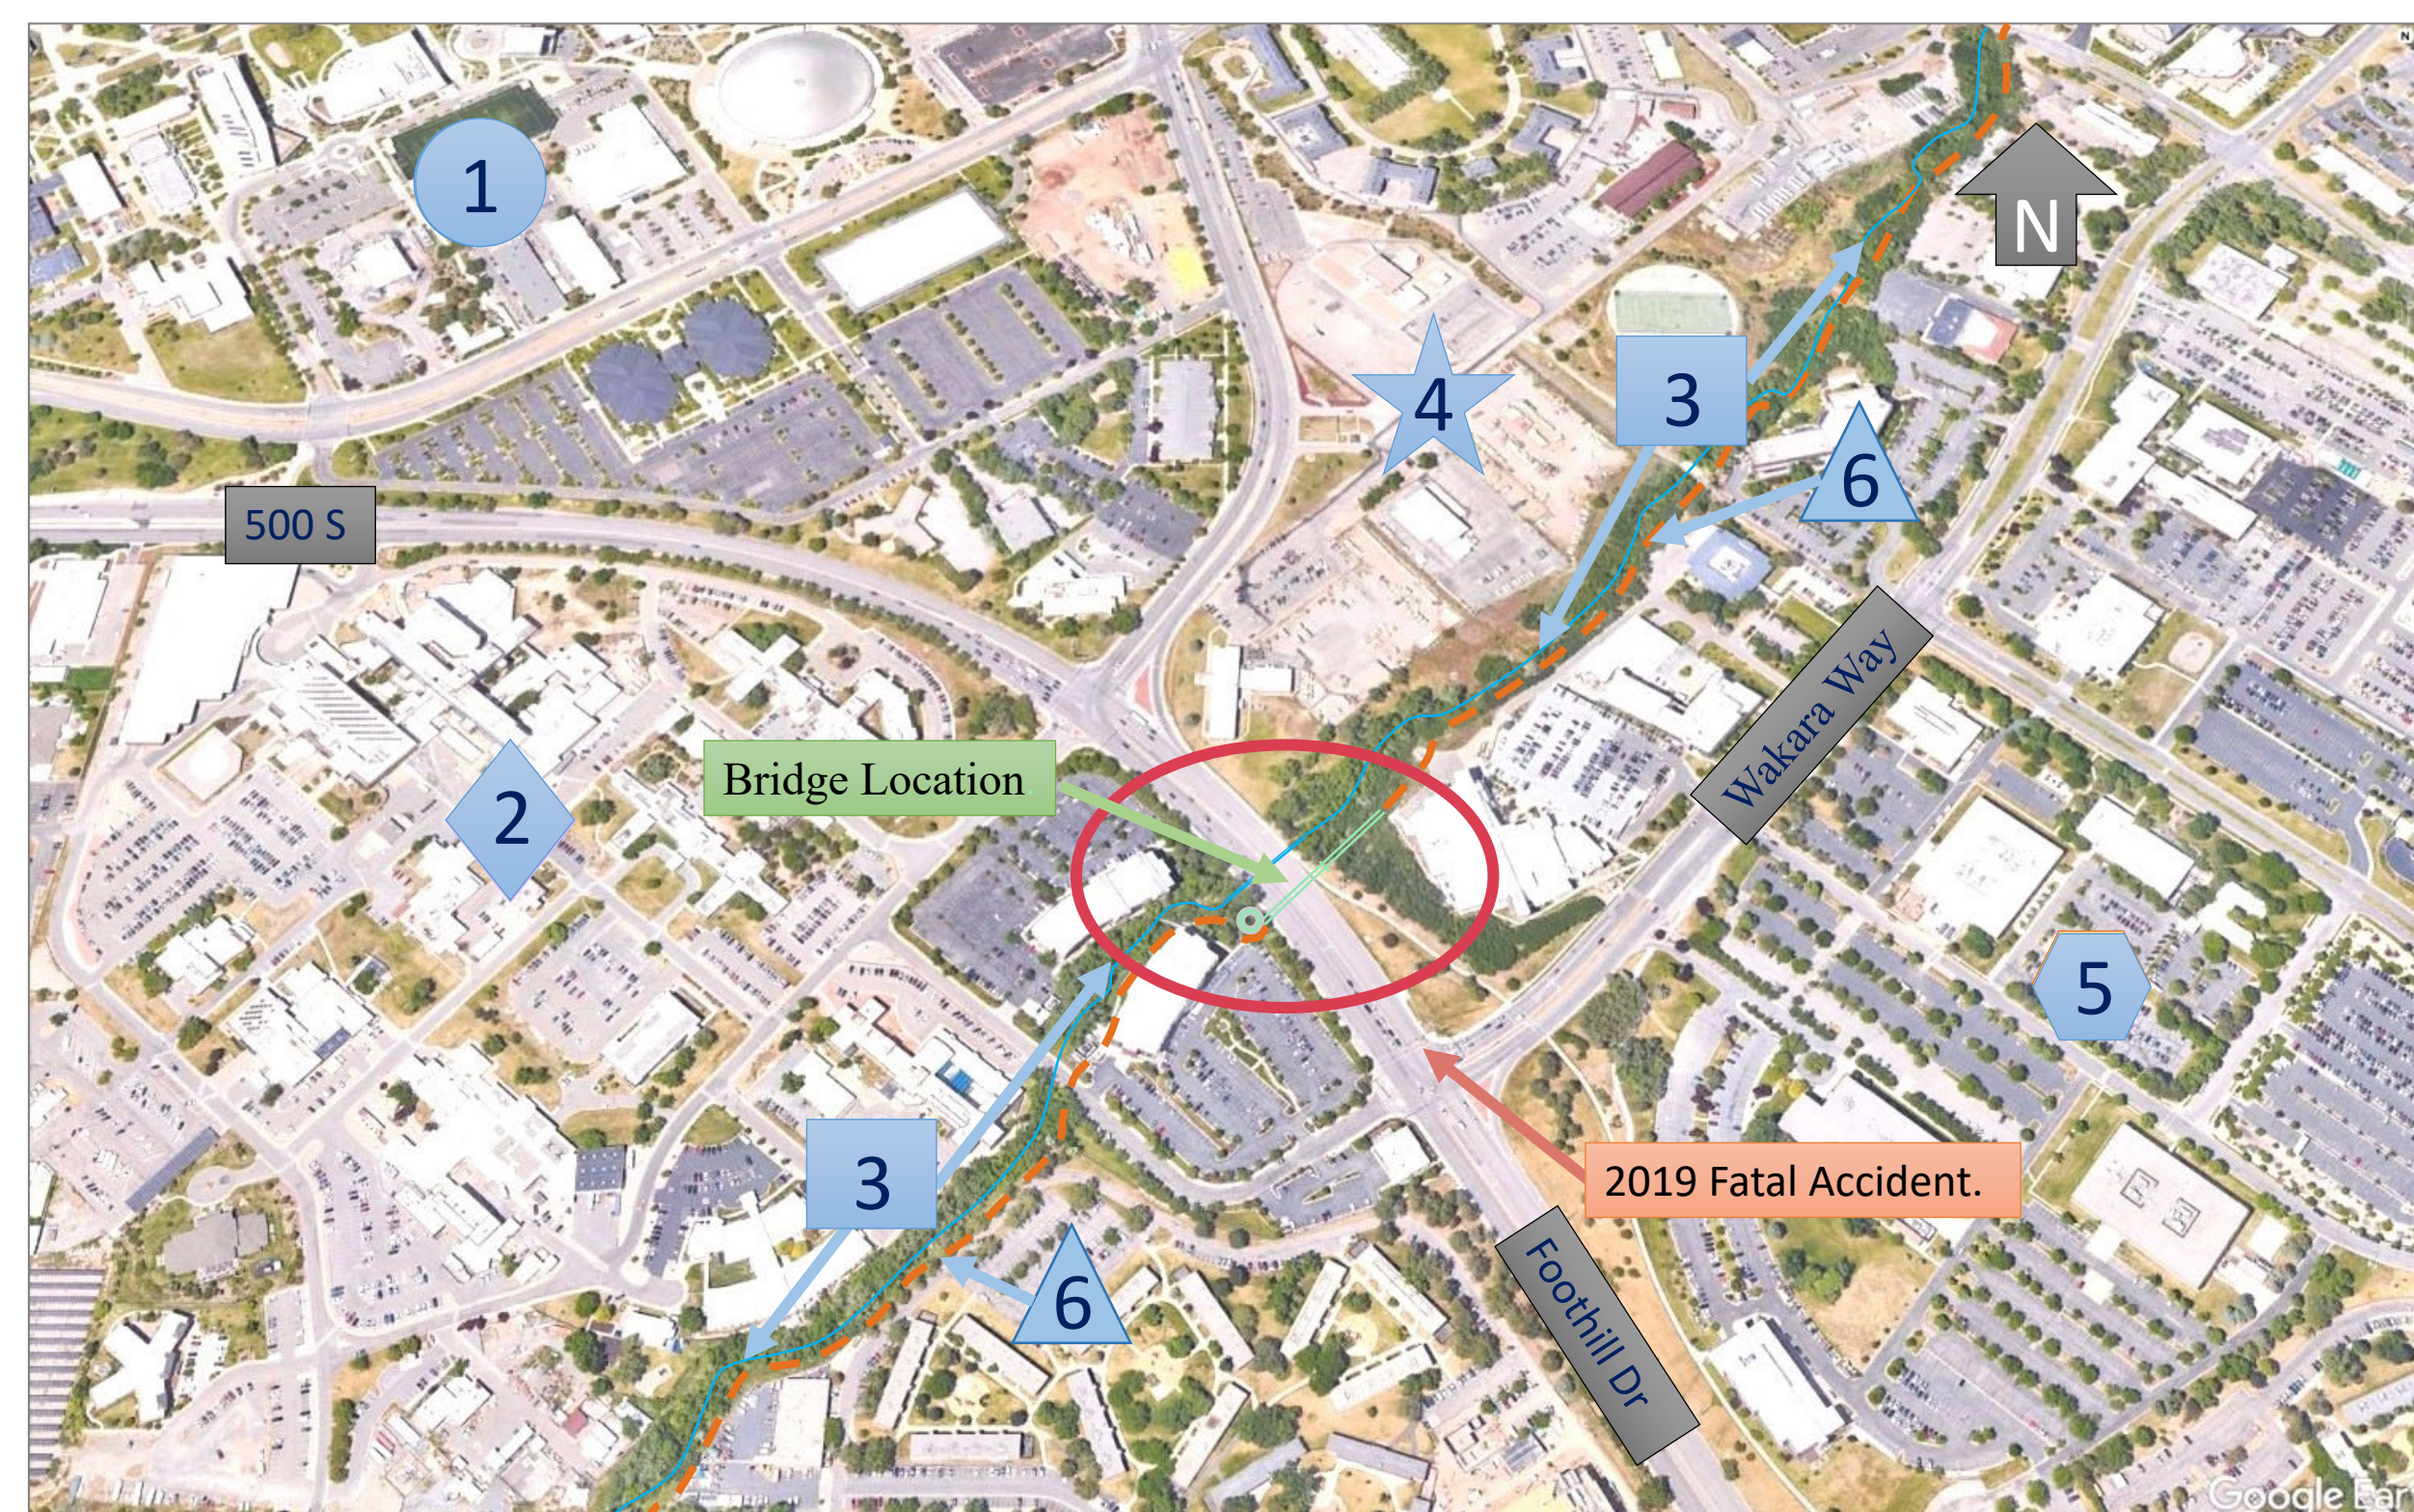

**Fatal Auto-Pedestrian Accident Location
& Location for the Bridge.**

- 1 University of Utah
- 2 V.A. Hospital
- 3 Red Butte Creek
- 4 Fort Douglas
- 5 Research Park
- 6 Trail (Location TBD)

Homogenous Community Aesthetic



Design Criteria

1. Enable Various Modes of Transportation (Cyclists, Pedestrians, Strollers, etc.)
2. Accessibility and Safety
3. Natural Environment Protection
4. Aesthetic Appeal
5. Sustainable Manufacturing

Safety Equity, Diversity, Inclusion, and Accessibility



Modes of Transportation



Stakeholder Interest's



Equity and Accessibility

SLC Municipality



SLC Trails

Connect to Future Trails

Sunnyside Neighborhood



Direct Passage Across Foothill



Utah Department of Transportation

Improve MOT and preserve Foothills right of way


Design Alternatives




UVU Pedestrian Bridge



U of U Legacy Bridge

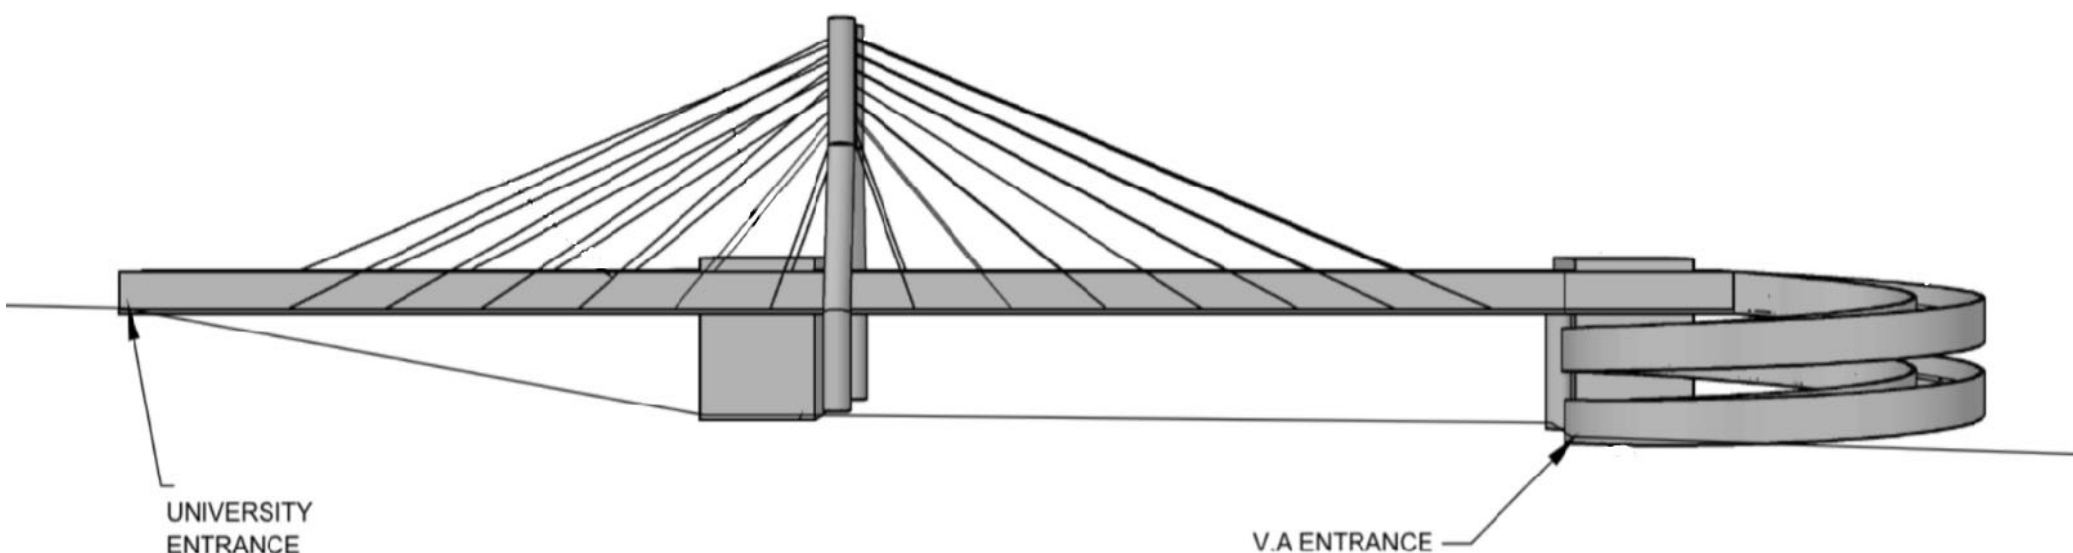

Foothill Dr. Pedestrian Overpass

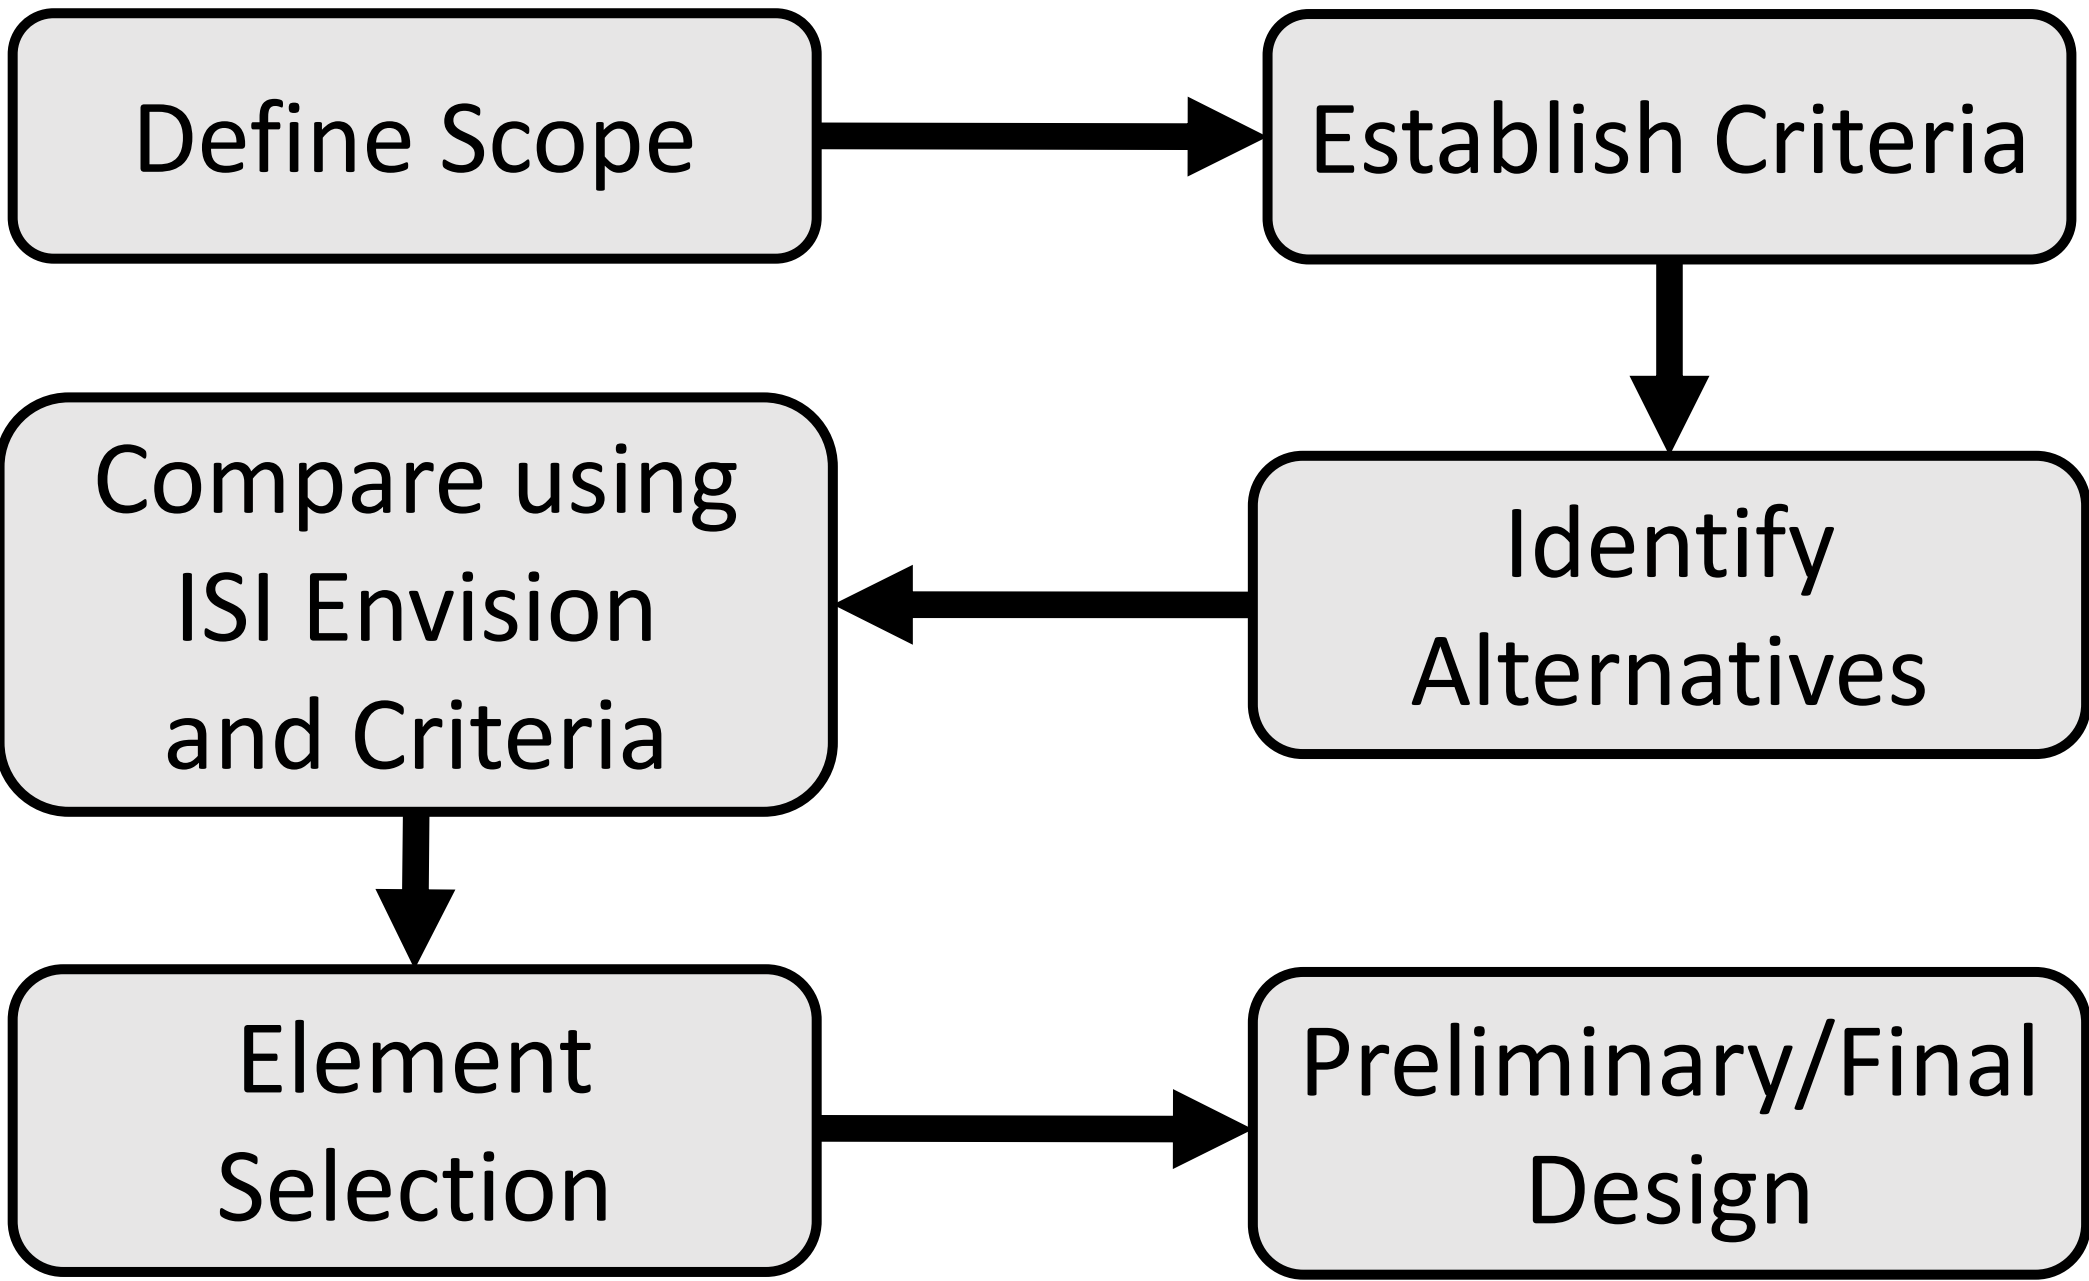

Elements:


- 1. Support Type**
Precast concrete archway, Cable Stayed, and Beam
- 2. Pedestrian Ascension**
Switchback stairs, Long stairwell, spiral ramp, and Earth slope
- 3. Foundations**
Shallow (Spread and Mat), and Deep (Piles and Drilled Shafts)
- 4. Location**
Stakeholder Restraints and feasibility
- 5. Environmental Considerations**
Materials, low impact construction, and Maintenance




Long Ramp Ascension



U of U Legacy Bridge Ascension

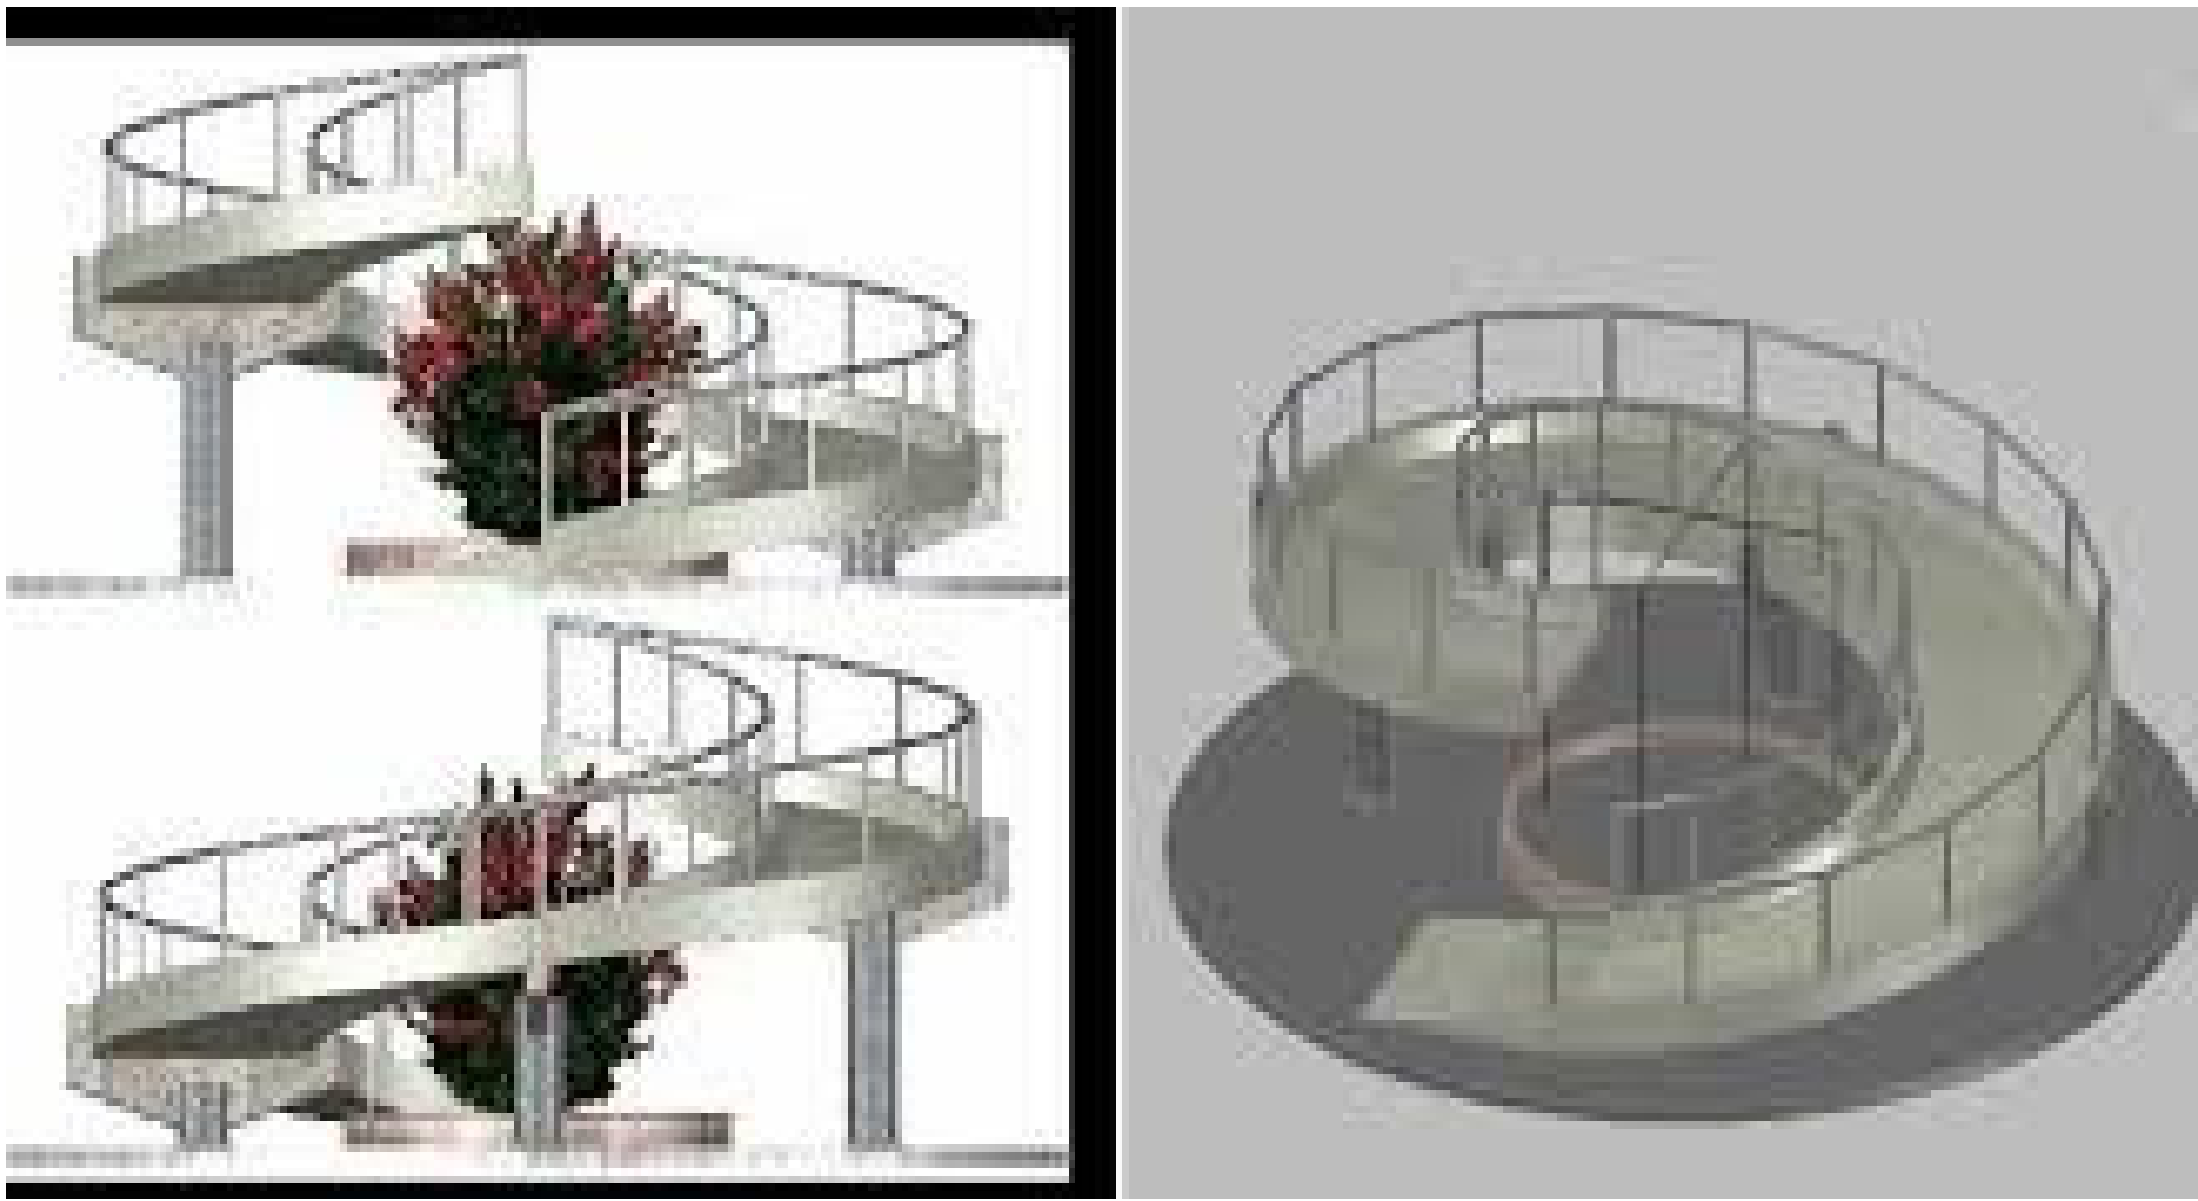

Foothill Dr. Pedestrian Ascension


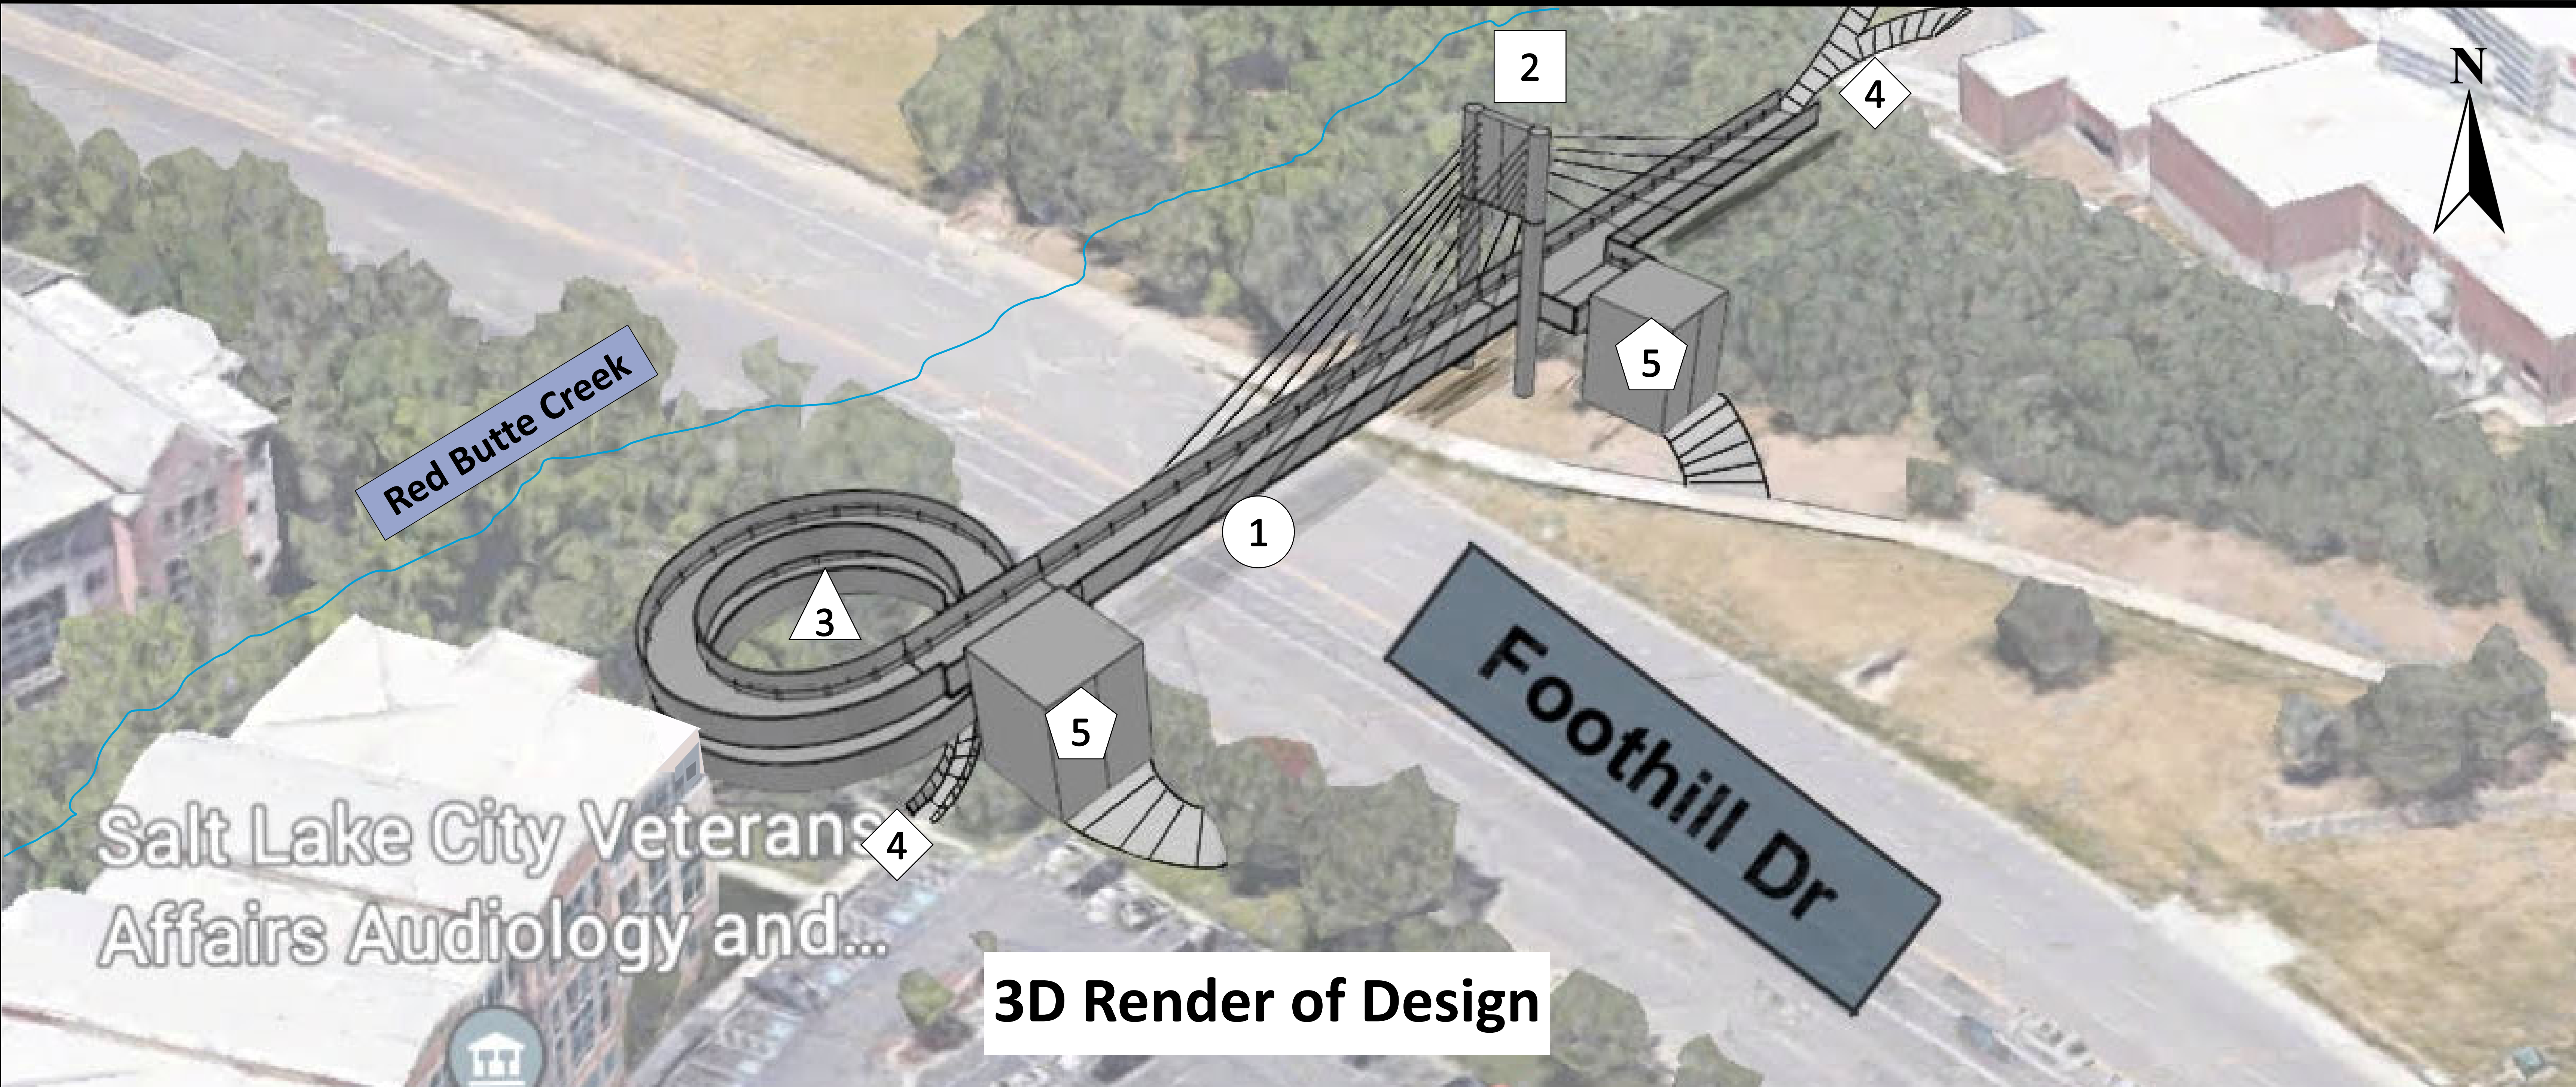


- 1 150' LONG SPAN, 15' WIDE PATH, 18.5' ROAD CLEARANCE
- 2 77' TALL CABLE-STAYED MAST
- 3 55' DIAMETER SPIRAL ACCESS RAMP, 13' WIDE PATH

- 4 CONNECTION TO FUTURE TRAIL SYSTEM
- 5 SPACE FOR POTENTIAL ELEVATOR INSTALLATION (SPECULATIVE)



Summary of Design

Deck Design

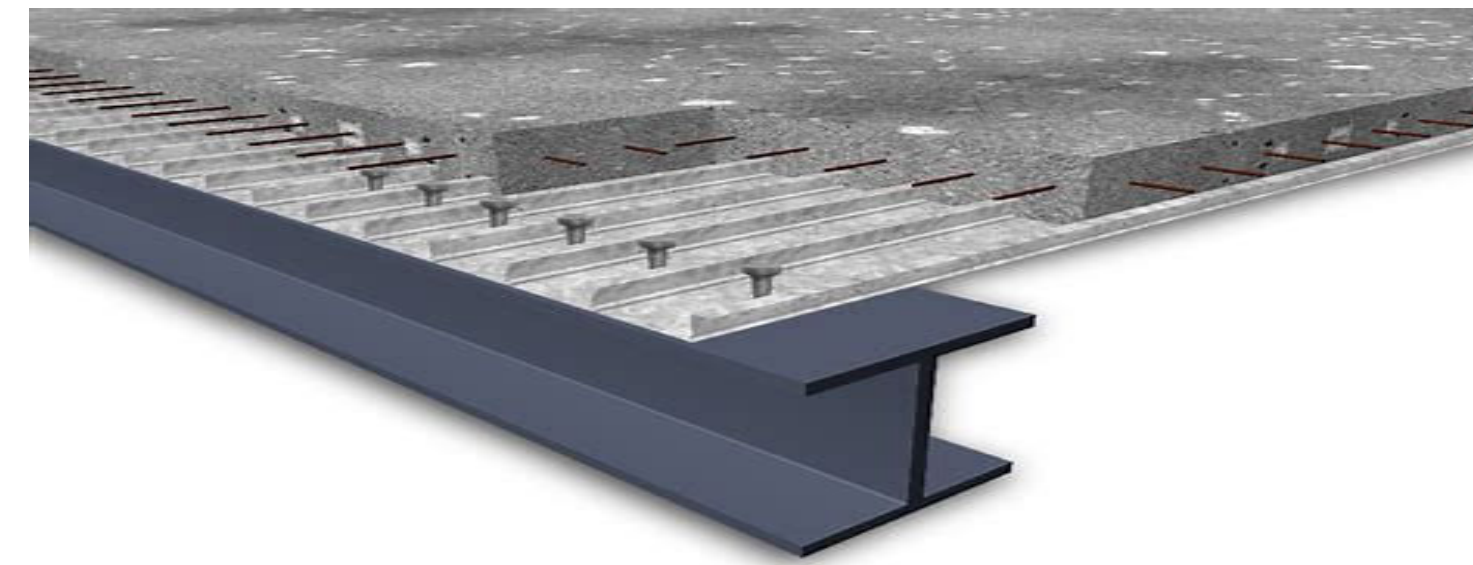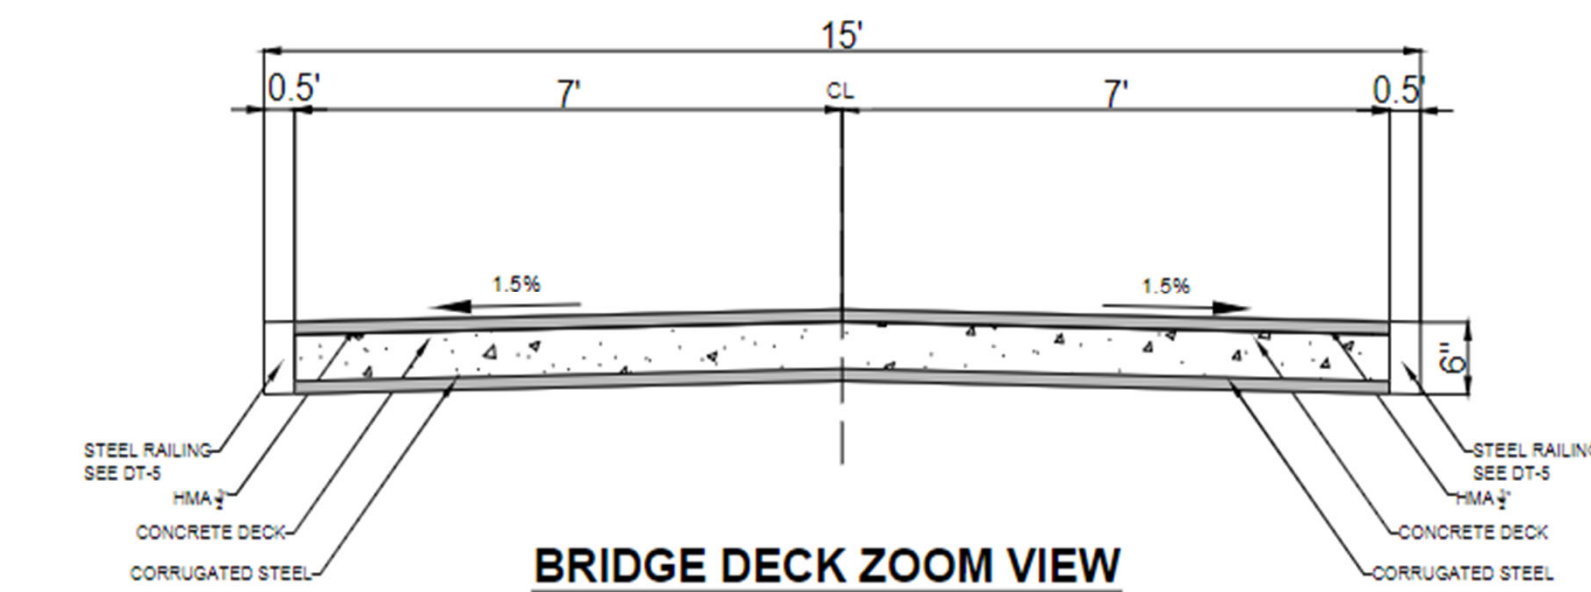


- **The bridge deck** thickness is 6" (4" thick concrete on top of a 2" metal deck). Using a metal deck will help make the overall deck use less material (instead of just using concrete)

- **The spiral ramp** was proposed with the intent of an aesthetic appeal vs a switch back ramp. If the elevator shown is used, the spiral ramp does not need to meet all ADA requirements.

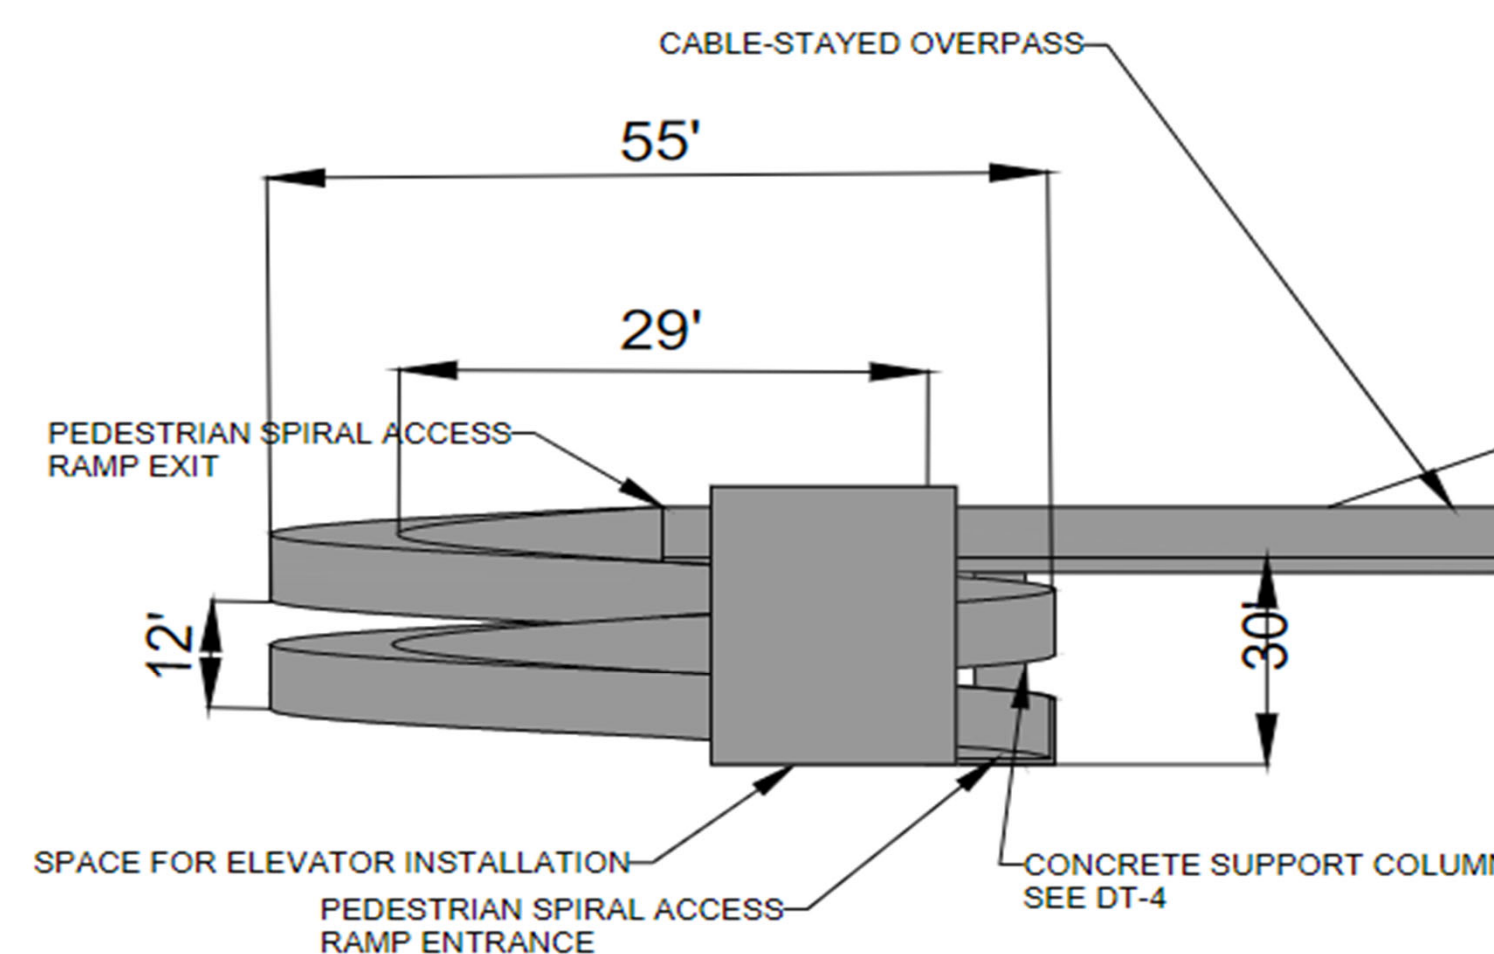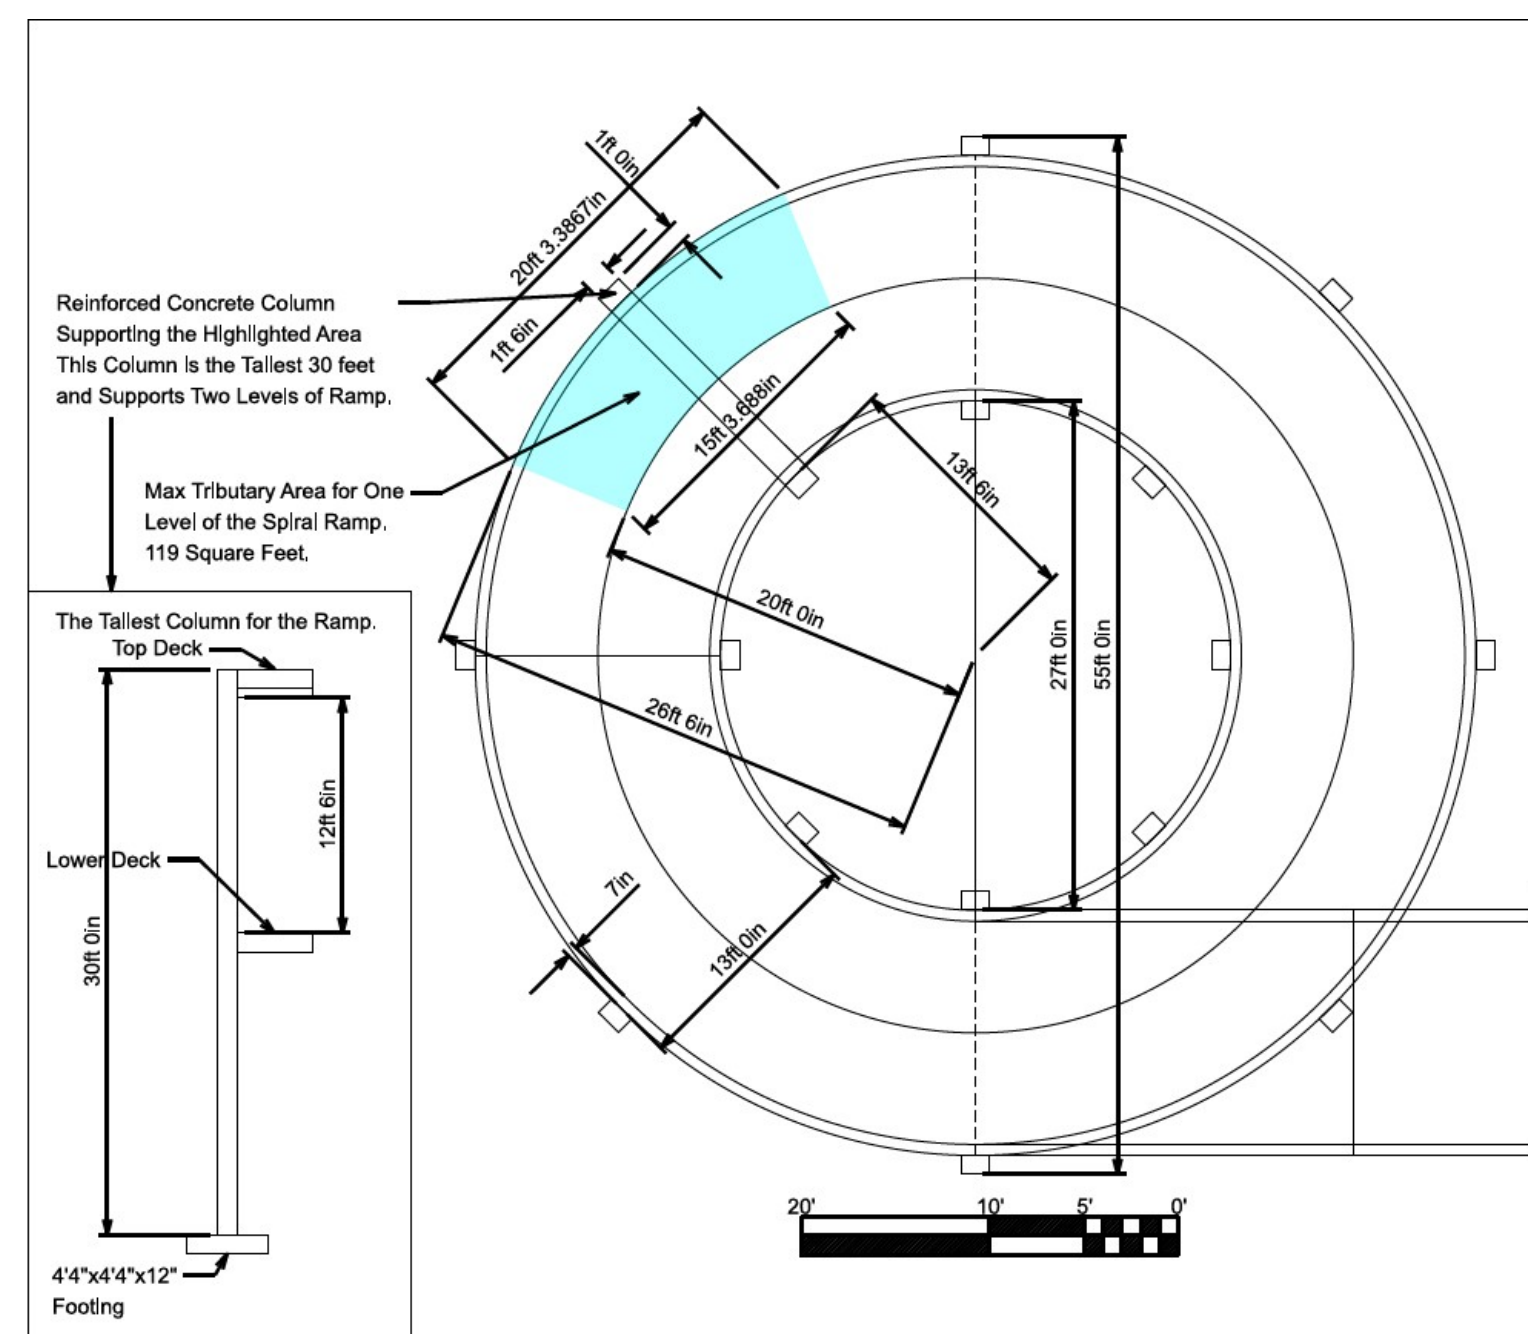


Cable-Stay Design

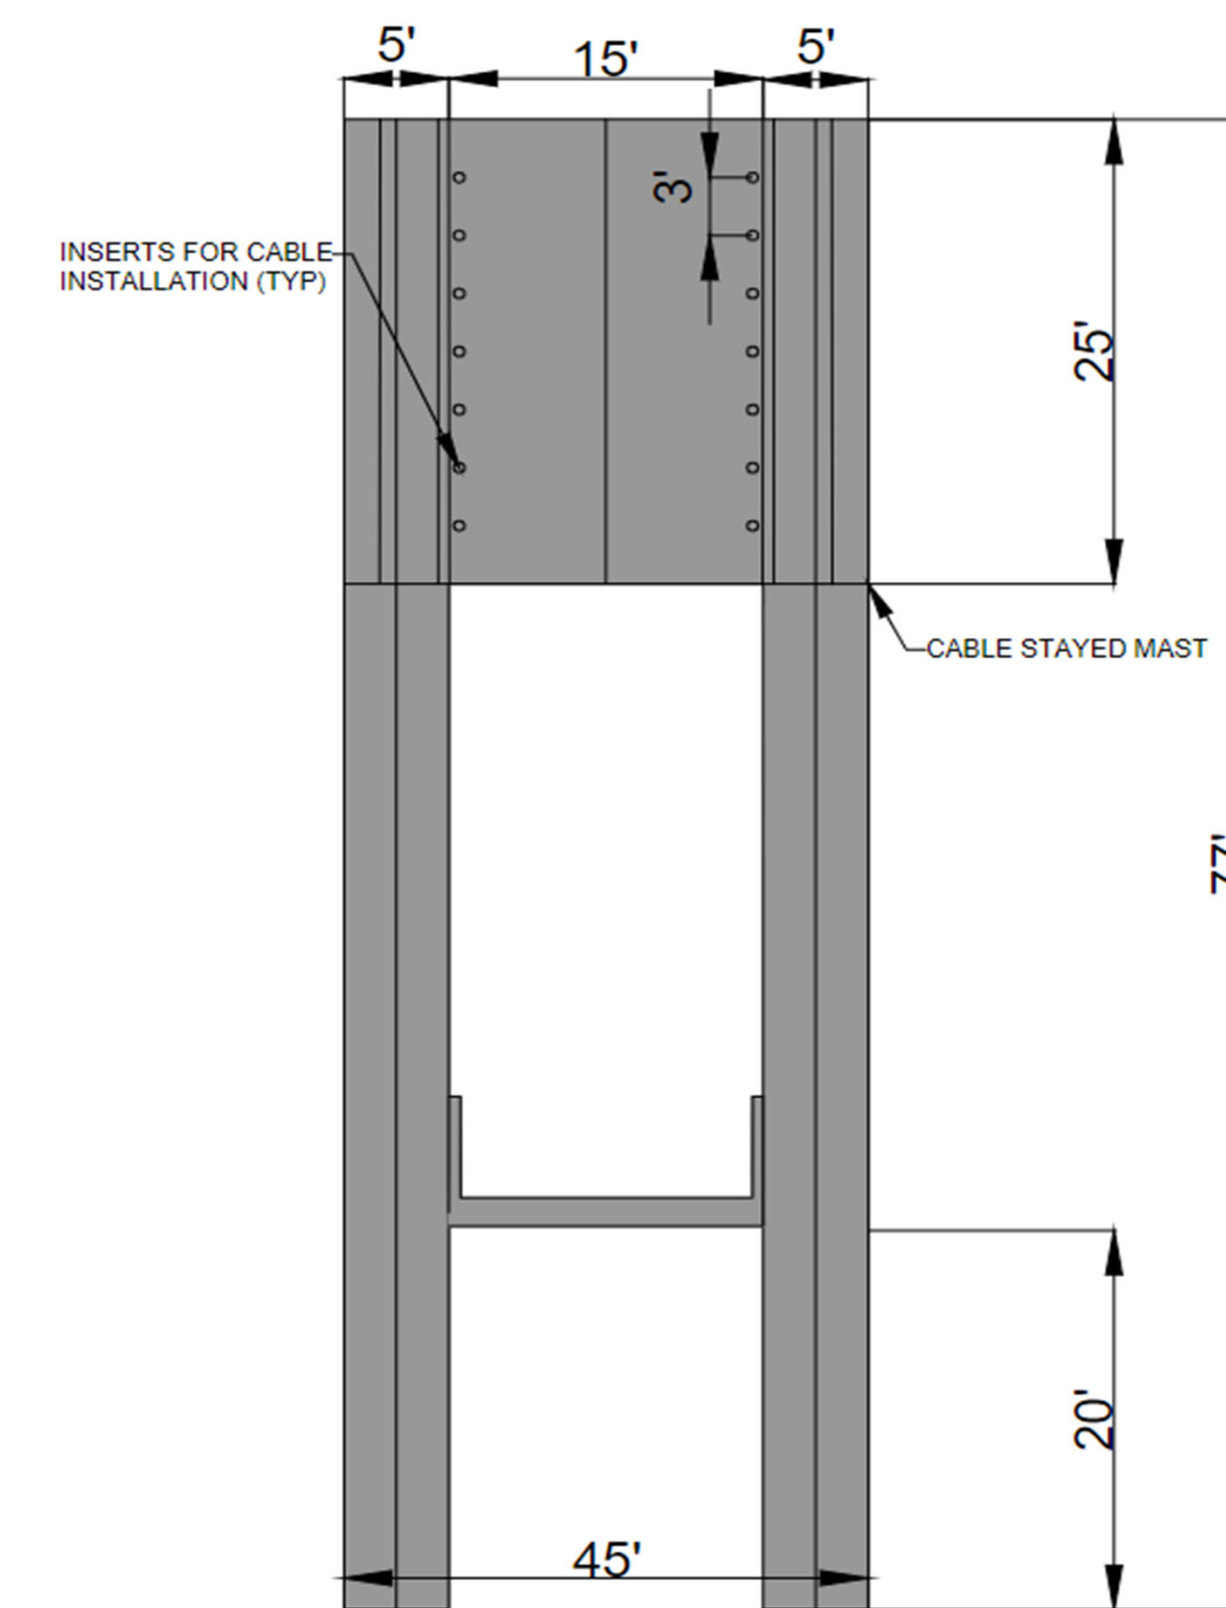


- **The mast** was influenced by the legacy bridge. The distance of bolts was meant to minimize the eccentric loading caused by the cables. The 20ft clearance is to meet code

- **The cables** were meant to be evenly spaced throughout the span length (1st and last cables were spaced 15ft from the ends and the rest evenly spaced 20ft)

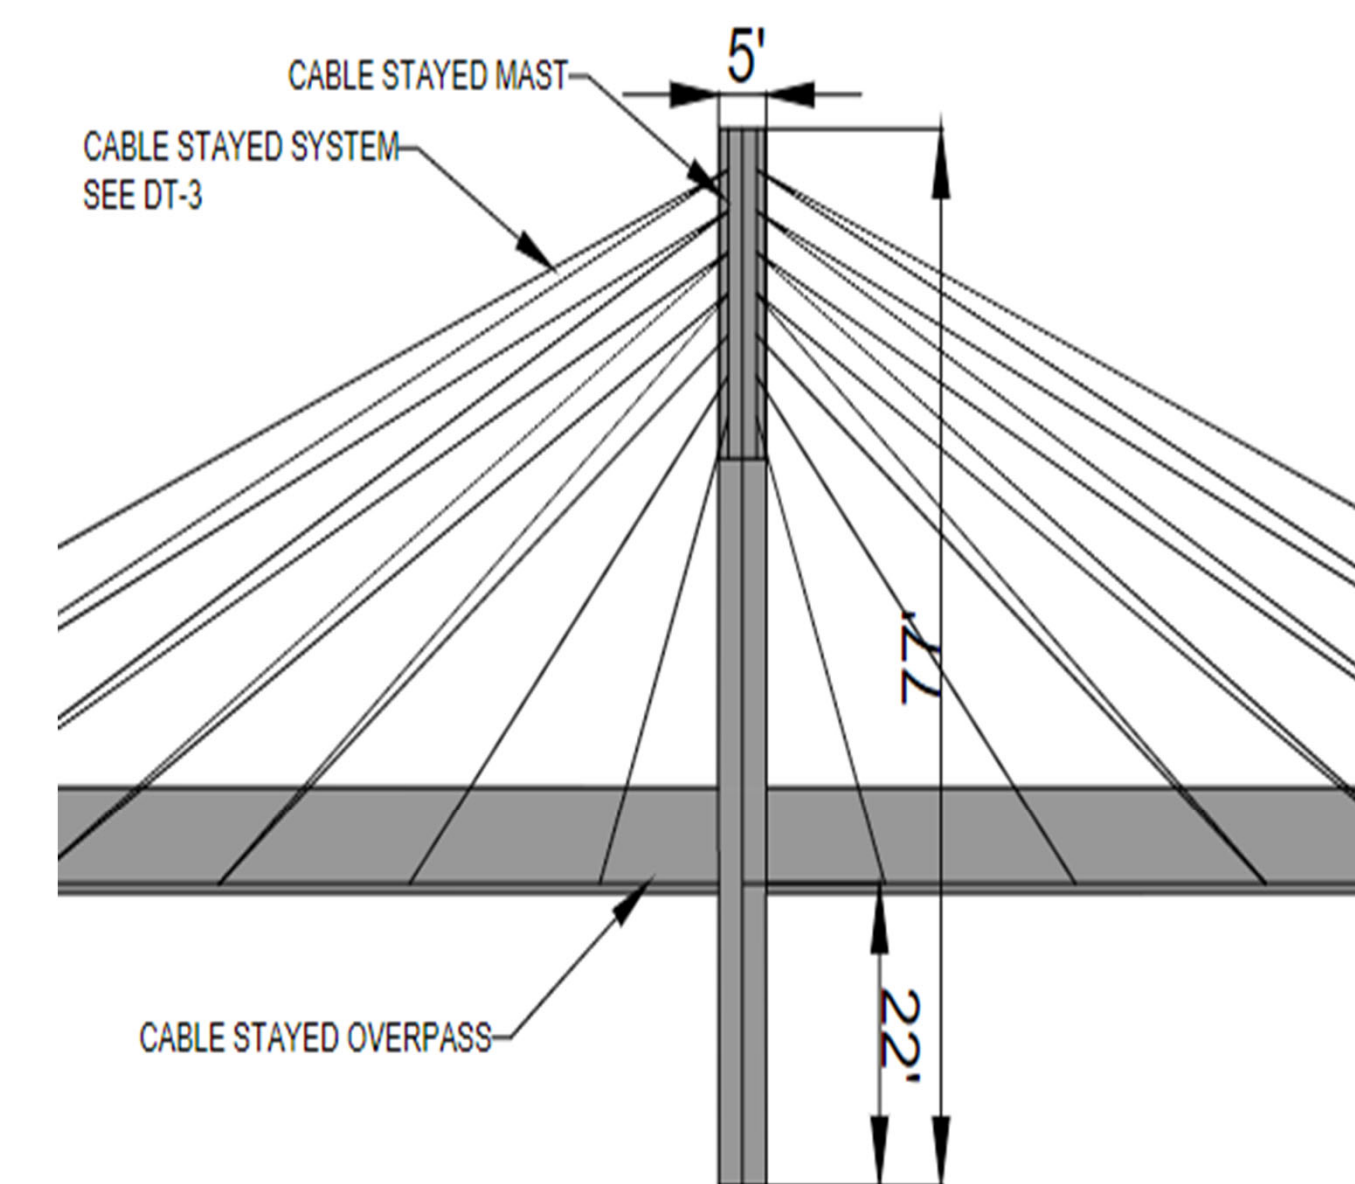


Design Summary Effectiveness

Cost Estimation

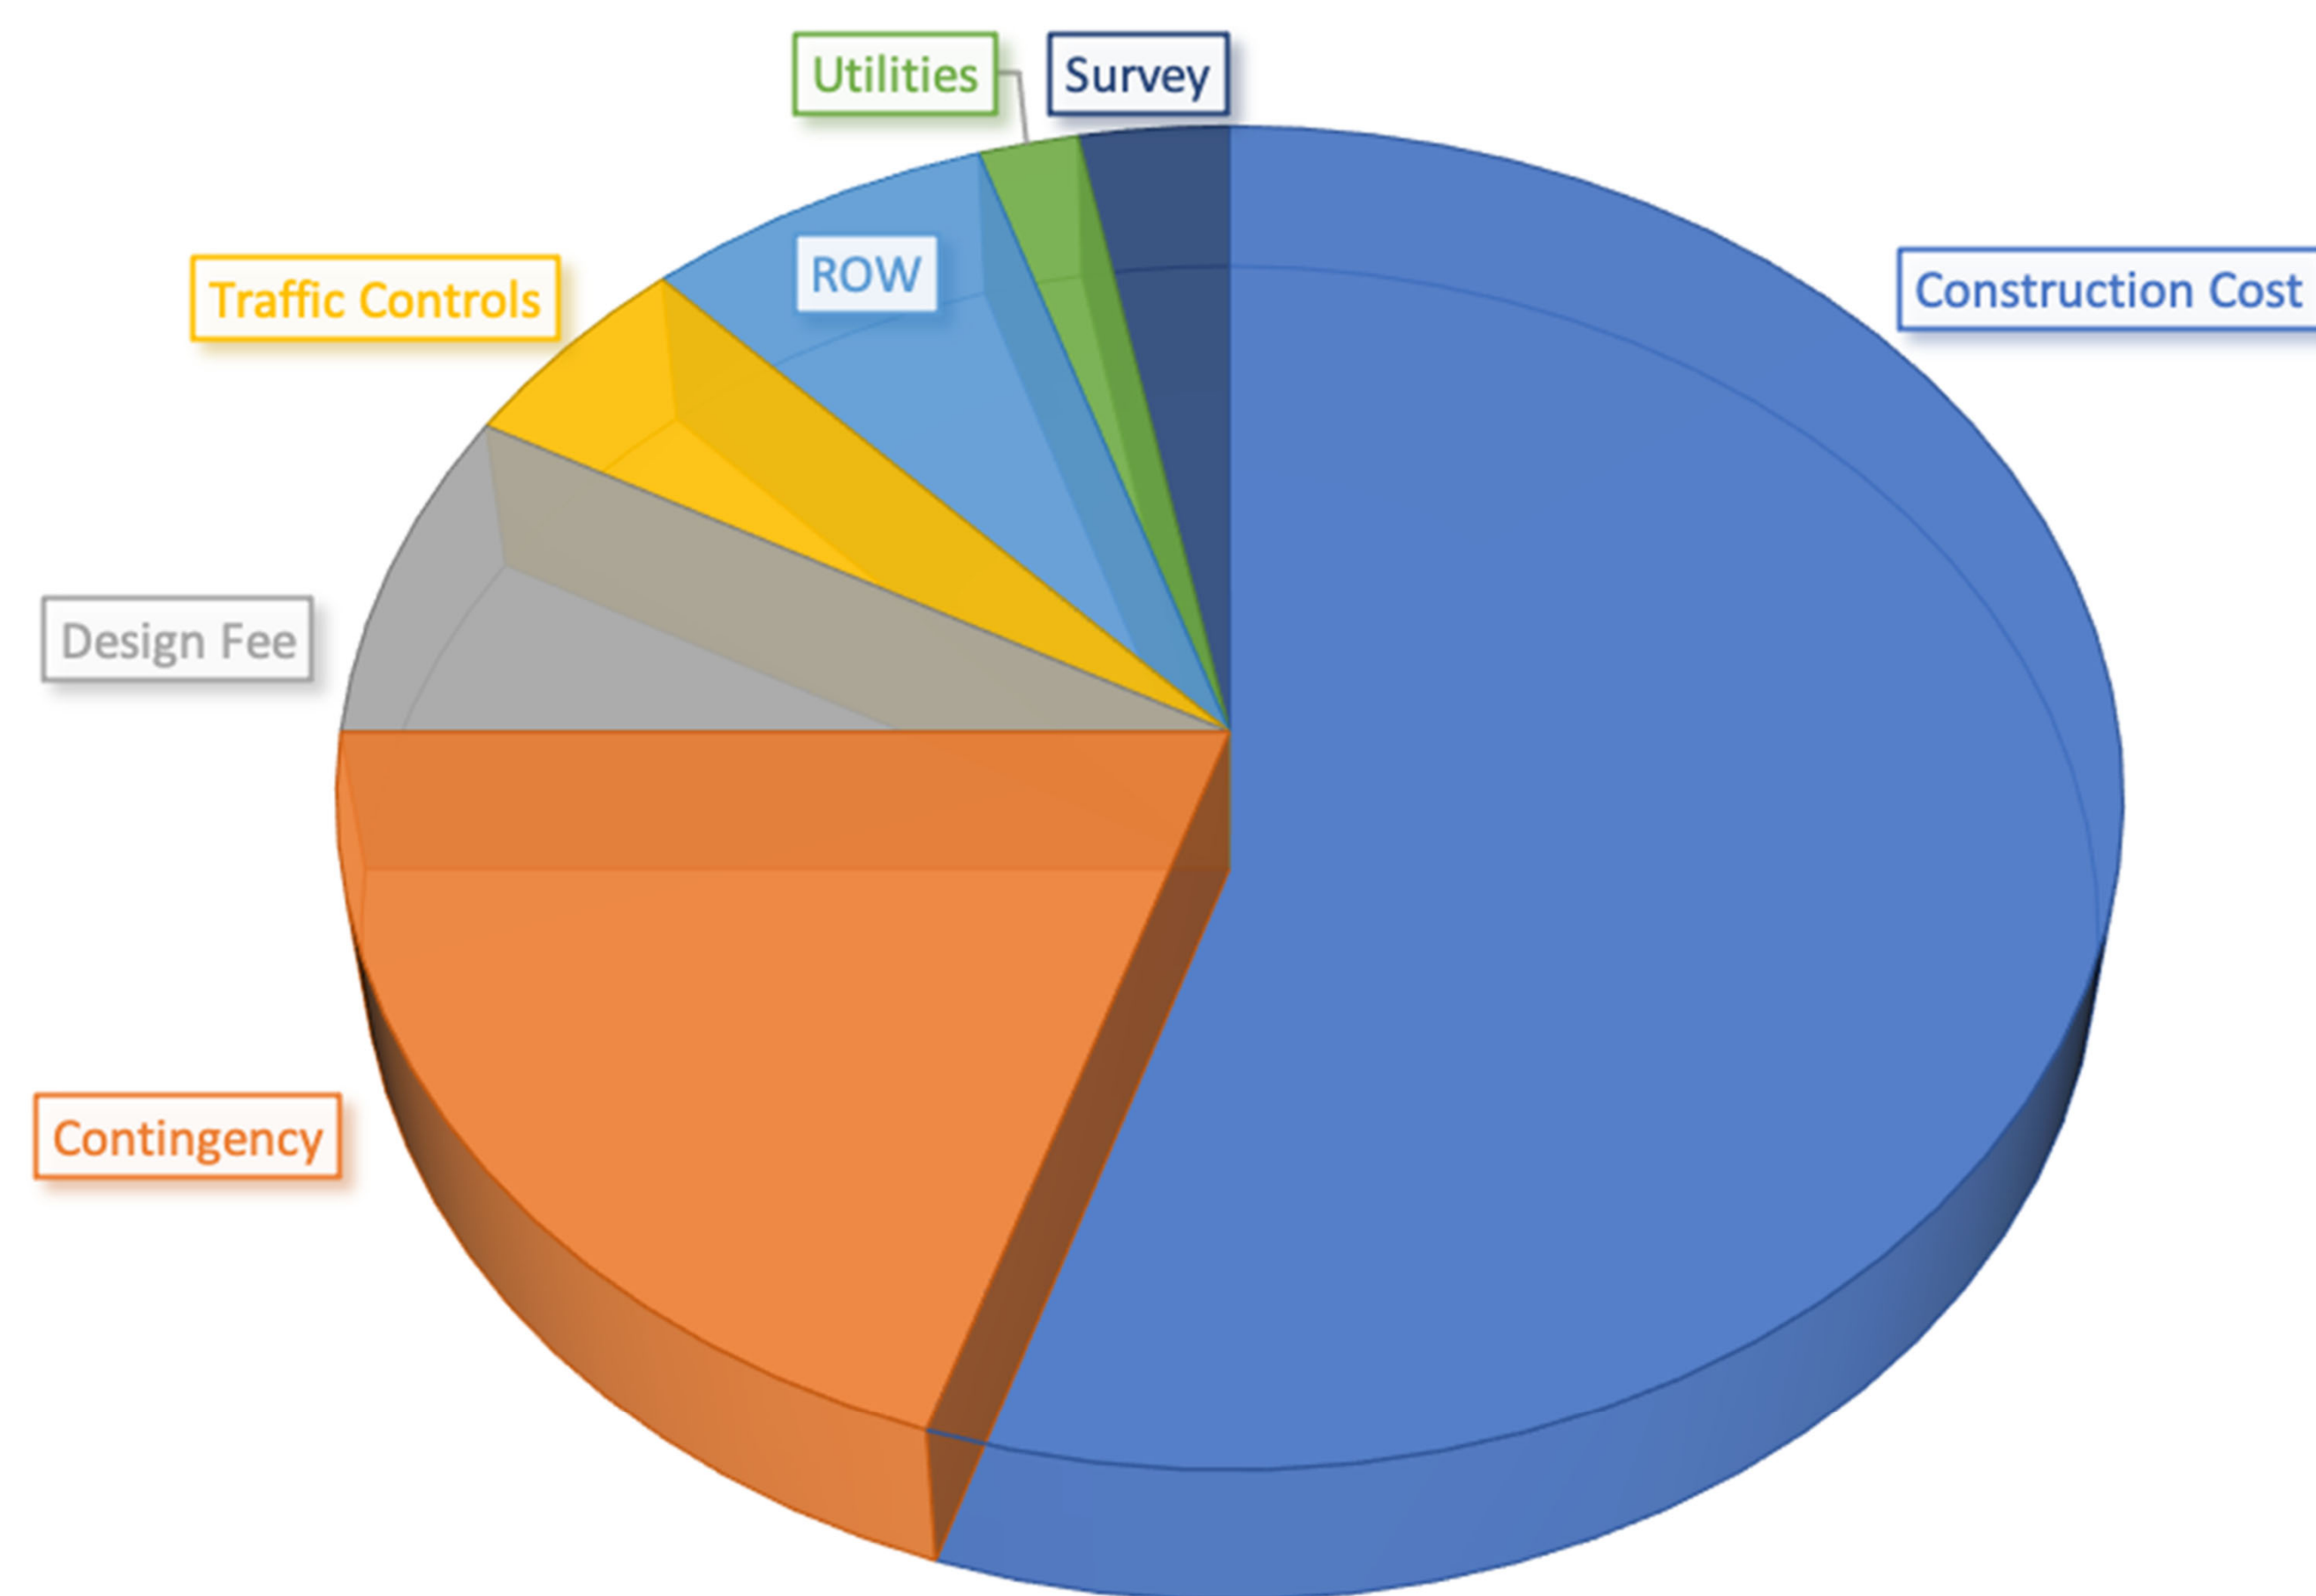


Total Cost: \$8.5 Million

Design Achievements:




Safe and Accessible for Many Different Pedestrians



Allows Simple Integration into Potential Trail Systems




Compact and Aesthetically Pleasing Design



Protects Natural Environment of Red Butte Creek

Design Effectiveness

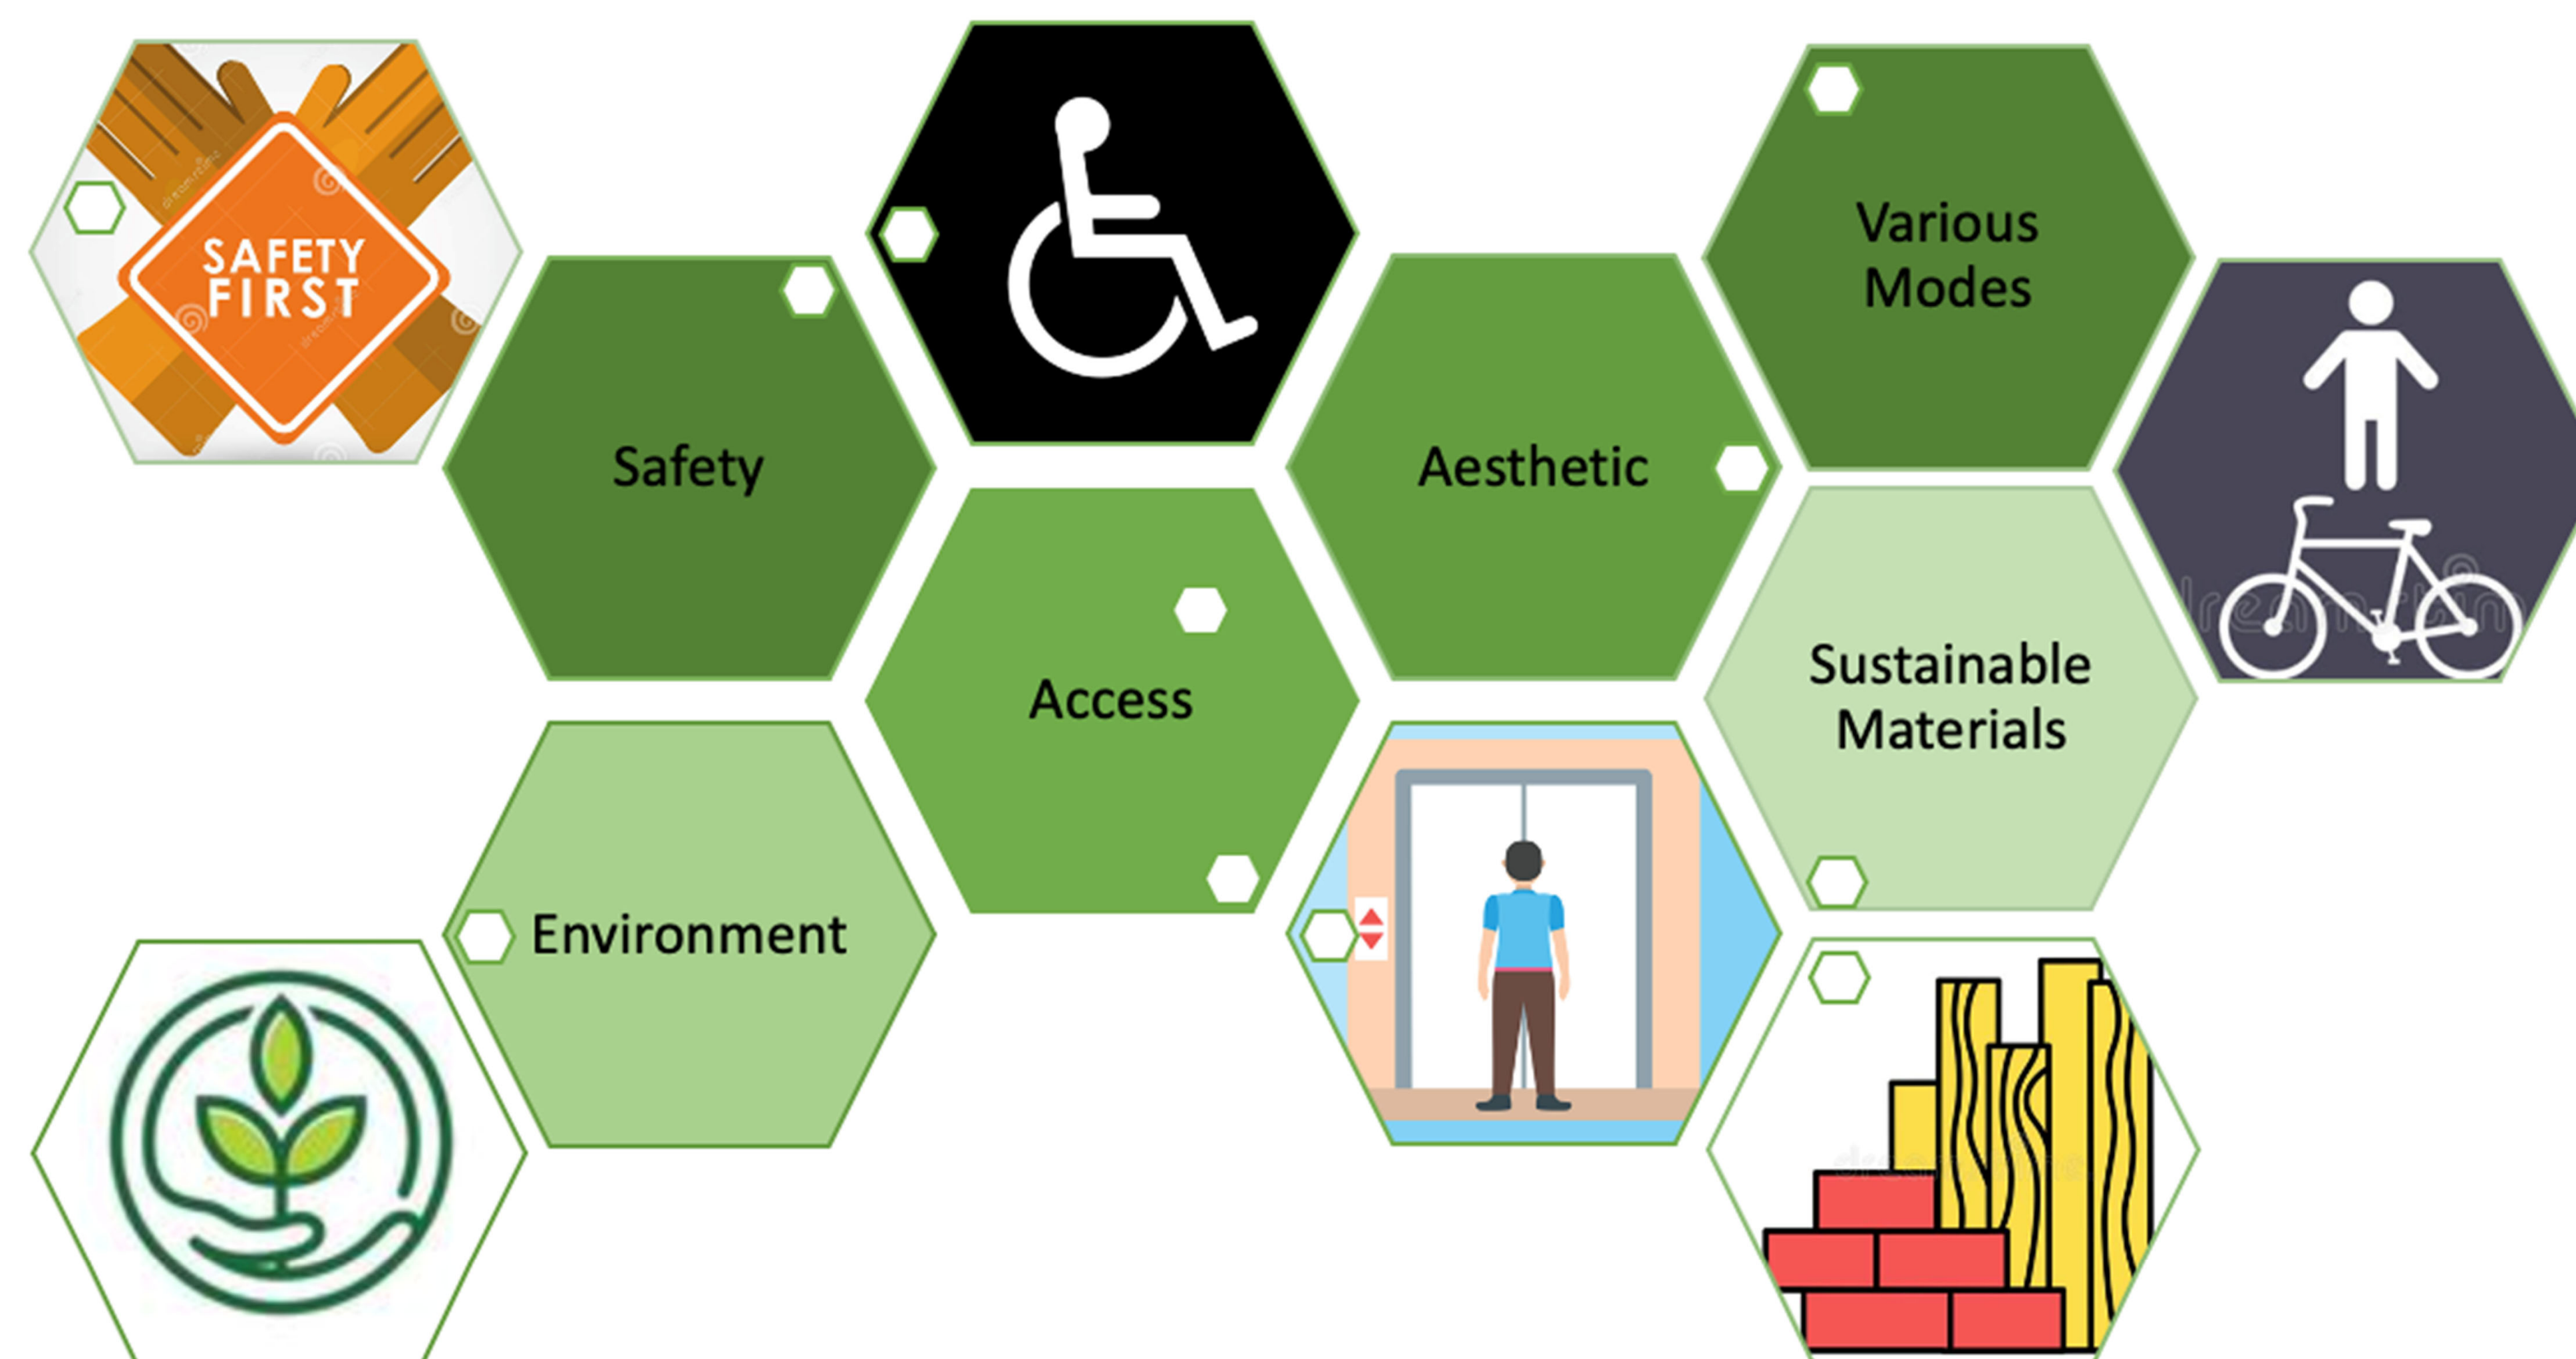

Design Effectiveness of Criteria (%)

